

GLK

ADJUSTABLE, RATCHET TORQUE WRENCHES WITH RUBBER GRIP


Freely set torque values within the capacity range. Replaceable socket, ratchet wrenches.

FEATURES

- The ratchet improves efficiency. These wrenches are well suited for repetitive work.
- By replacing the sockets, various sizes of fasteners can be tightened within the tool's capacity range.
- By reversing the ratchet, the wrench can be used to loosen fasteners counter-clockwise.
- Tightening to a torque setting can only be done clockwise.
- Accuracy : $\pm 3\%$ of indicated value over the full range.



60~1400GLK

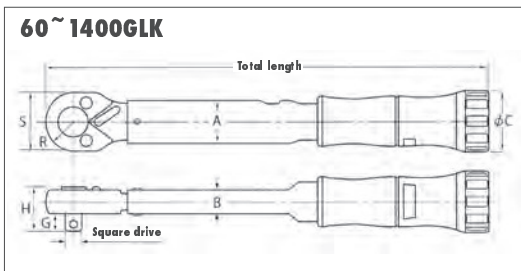

Model (kgf·cm)	Range (kgf·cm)	Increment (kgf·cm)	Model (N·m)	Range (N·m)	Increment (N·m)	Square drive (mm)	Total length (mm)	Dimensions (mm)							Weight (kg)
								Head				Body			
								H	G	S	R	A	B	φC	
60GLK	20~60	1	N6GLK	2~6	0.1	6.35 (1/4")	187	18.8	7.5	24	12	18.2	9.6	29	0.2
120GLK	40~120	2	N12GLK	4~12	0.2										0.28
250GLK	50~250	2	N25GLK	5~25	0.2	9.53 (3/8")	233	25	11	31	15.5				0.47
500GLK	100~500	5	N50GLK	10~50	0.5		255			32	16	25	11.4	35	0.47
1000GLK	200~1000	10	N100GLK	20~100	1		355								0.8
1400GLK	400~1400	10	N140GLK	40~140	1	12.7 (1/2")	395	31	14	39.4	19.7	27.5	12.4	38	0.87
2000GLK	400~2000	20	N200GLK	40~200	2		480	33	15.4	46	23	34	15.4	40	1.48

BLK

ADJUSTABLE BY HEX WRENCH, RATCHET TORQUE WRENCHES WITH RUBBER GRIP

Freely set torque values within the capacity range. Replaceable socket, ratchet wrenches.


FEATURES

- Adjusted setting torque value by hex wrench.
- The ratchet improves efficiency. These wrenches are well suited for repetitive work.
- By replacing the sockets, various sizes of fasteners can be tightened within the tool's capacity range.
- By reversing the ratchet, the wrench can be used to loosen fasteners counter-clockwise.
- Tightening to a torque setting can only be done clockwise.
- Accuracy : $\pm 3\%$ of indicated value over the full range.



250~1000BLK

*Hex wrench is not included

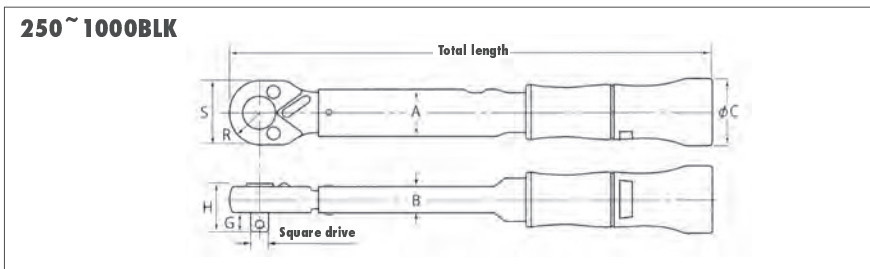

Hex wrench
2.5mm for 250, N25BLK

Hex wrench
4mm for N50, N100, N140BLK
500, 1000, 1400BLK

Model (kgf·cm)	Range (kgf·cm)	Increment (kgf·cm)	Model (N·m)	Range (N·m)	Increment (N·m)	Square drive (mm)	Total length (mm)	Dimensions (mm)						Weight (kg)
								Head			Body			
								H	G	R	A	B	C	
250BLK	50~250	2	N25BLK	5~25	0.2		229							
500BLK	100~500	5	N50BLK	10~50	0.5	9.53(3/8")	247	25	11	15.5	18.2	9.6	30	0.26
1000BLK	200~1000	10	N100BLK	20~100	1		346			16	25	11.4	33	0.44
1400BLK	200~1400	10	N140BLK	20~100	1	12.7(1/2")	386	31	14	19.7	27.5	12.4	36	0.78
														0.85