


# ZLK

## KANON insulated adjustable type torque wrench

Special 2-layer insulation coating preventing shock hazard

### FEATURES

- Torque value preset is available within the capacity according to your need.
- Special 2-layer insulation coating is a risk protection for users against shock hazard.
- Damage to coating is easy to recognize from the different color for the top and the bottom layer of special 2-layer insulation coating.
- Withstand voltage is 1000V AC at maximum.
- Best for maintenance and inspection for electric vehicles
- Exclusive design for cw tightening
- The accuracy is guaranteed within a tolerance of 3%.

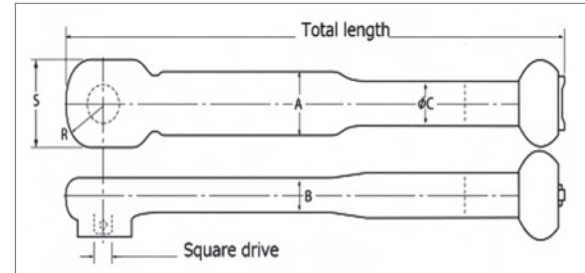

Model (N·m)	Range	Increment	Square Drive	Total length	Dimensions (mm)					Weight
					Head		Body			
					S	R	A	B	φC	
N50ZLK	10~50	0.5	9.53 (3/8")	287	38	19	31	17.4	21	0.52
N100ZLK	20~100	1	12.7 (1/2")	392	45	22.5	33.5	19.4	23	0.89