



DTC-REV-A DATA OUTPUT DIGITAL TORQUE WRENCHES

Multi Function dataout put digital torque wrench with OLED display.

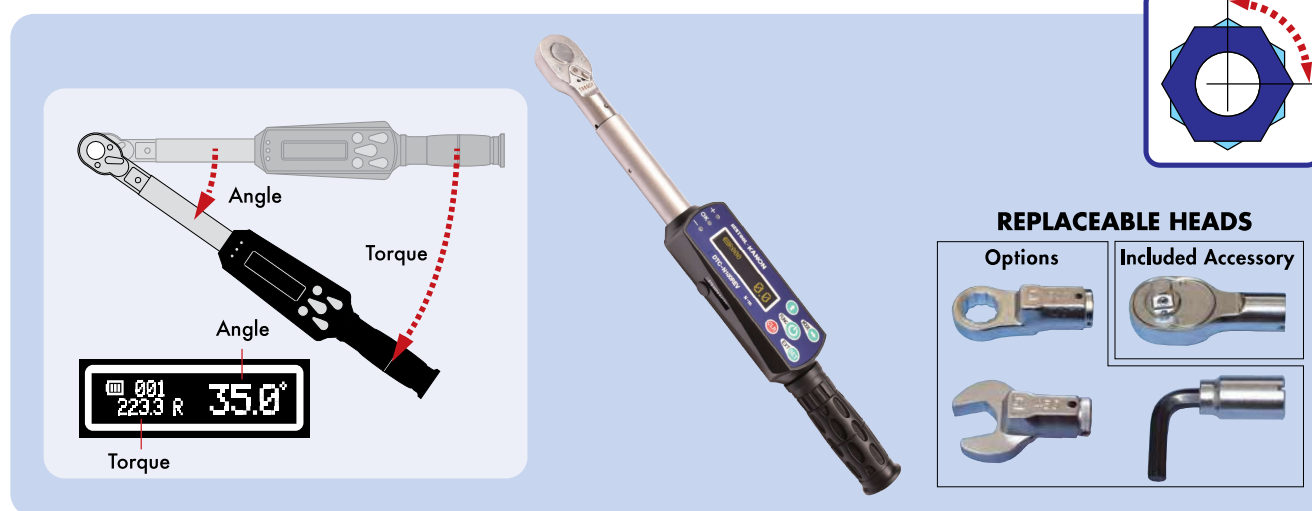

FEATURES

- Accuracy : ±1% of indicated value +1 increment, over full range
- Display : OLED
- Measuring mode : ①Peak hold ②Peak to Peak ③Tracking
- Measuring direction: CW / CCW changeover, provided with
: CW / CCW status display
- Power supply : Lithium-ion rechargeable battery 18650
100-240V battery charger
- Battery Life : Approx. 20 hours with fully charged
battery. (continuous operation)
- Auto power-off : Approx. 30 minutes
- Tolerance setting : 1 to 10%. Automatic judgment for pre-set target torque
- Data input : 1000 data can be stored

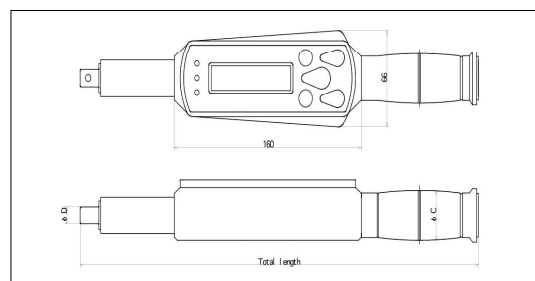

It can be measured tightening torque (CW) and loosening torque (CCW) with digital display. When the pre-set target torque is achieved, it can be confirmed with change of sounds. The preset values and tolerance can be set and the pass/fail judgment appears on LED. Data include the date (year, month, date) and time (hour, min, second) in DTC-REV. Since the OLED is high visibility, the display is easy to read even in the dark.

Model	Range(Unit)	Increment	Total length (mm)	φ D.	φ C	Weight (Kg)	Accessory
DTC-N10REV-A	1 ~ 10N·m	0.01N·m	314	10	35	0.8	12 QCK
DTC-N50REV-A	5 ~ 50N·m	0.01N·m	342	12	35	0.9	50 QCK
DTC-N100REV-A	10 ~ 100N·m	0.1N·m	386	15	35	1.1	100 QCK
DTC-N200REV-A	20 ~ 200N·m	0.1N·m	404	18	35	1.25	200 QCK
DTC-N300REV-A	30 ~ 300N·m	0.1N·m	535	22	35	1.8	280 QCK-A
DTC-N500REV-A	50 ~ 500N·m	0.1N·m	1063	30	34	4.2	700 QCK
DTC-N1000REV-A	100 ~ 1000N·m	1N·m	1417	34	34	7.6	1000 QCK
DTC-100REV-A	10 ~ 100kgf·cm	0.1kgf·cm	314	10	35	0.8	12 QCK
DTC-500REV-A	50 ~ 500kgf·cm	0.1kgf·cm	342	12	35	0.9	50 QCK
DTC-1000REV-A	100 ~ 1000kgf·cm	1kgf·cm	386	15	35	1.1	100 QCK
DTC-2000REV-A	200 ~ 2000kgf·cm	1kgf·cm	404	18	35	1.25	200 QCK
DTC-3000REV-A	3 ~ 30kgf·m	0.01kgf·m	535	22	35	1.8	280 QCK-A
DTC-5000REV-A	5 ~ 50kgf·m	0.01kgf·m	1063	30	34	4.2	700 QCK
DTC-10000REV-A	10 ~ 100kgf·m	0.1kgf·m	1417	34	34	7.6	1000 QCK
DTC-PI80REV-A	8 ~ 80lbf·in	0.01lbf·in	314	10	35	0.8	12 QCK
DTC-PI400REV-A	40 ~ 400lbf·in	0.1lbf·in	342	12	35	0.9	50 QCK
DTC-PI800REV-A	80 ~ 800lbf·in	0.1lbf·in	386	15	35	1.1	100 QCK
DTC-PF100REV-A	10 ~ 100lbf·ft	0.1lbf·ft	404	18	35	1.25	200 QCK
DTC-PF200REV-A	20 ~ 200lbf·ft	0.1lbf·ft	535	22	35	1.8	280 QCK-A
DTC-PF400REV-A	40 ~ 400lbf·ft	0.1lbf·ft	1063	30	34	4.2	700 QCK
DTC-PF800REV-A	80 ~ 800lbf·ft	1lbf·ft	1417	34	34	7.6	1000 QCK

Bluetooth function is option: DTC-REV-B (Certified in USA, Canada, Europe, Korea, Taiwan)