

E-RX-J


Adequate for center distance measurement for holes at different levels



Digital direct reading of center distance measurement "between holes with equal diameter at different levels"

Direct reading system
Digital

E-RX30J

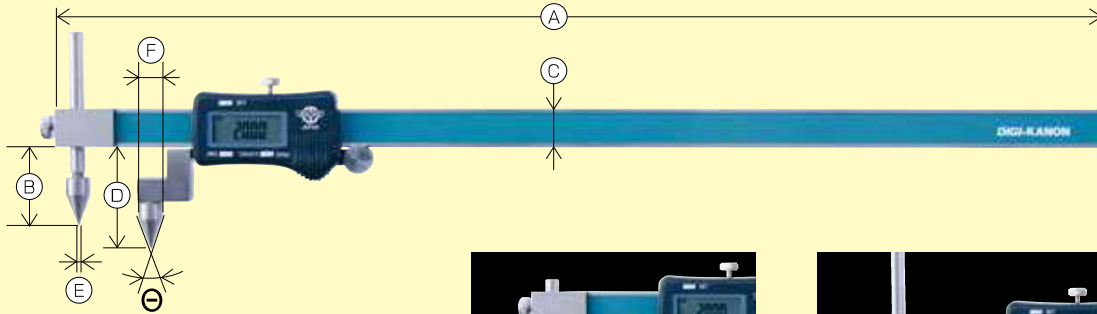

- Since the probe of main scale moves vertically, center distance measurement between holes at different levels is available.



E-RX-J : Specifications

(Unit : mm)


Model	Measuring range	Resolution	Instrumental error	Minimum hole diameter	Maximum hole diameter	Power supply	Weight	A	B	C	D	E	F	∅
E-RX30J	10~300	0.01	±0.05	φ 2	φ 9	SR44 1 piece	300g	435	18~52	16	42	φ 1	φ 10	40°

RM-DX

Centerline caliper for distance between center to center distance of holes with equal diameter



Adequate for center to center distance measurement!

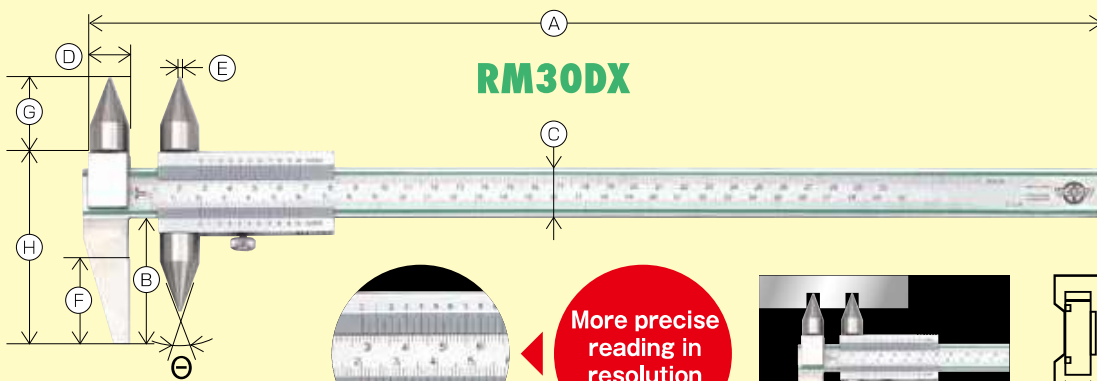

RM-DX : Specifications

(Unit : mm)

Model	Measuring range		Minimum reading	Instrumental error	Minimum hole diameter	Maximum hole diameter	Weight	A	B	C	D	E	F	G	H	I	∅					
	Pitch for upper side	Pitch for lower side																				
RM15DX	17~150	9~150	0.05 (Division of 39 mm into 20 equal parts)	±0.07	φ 3	φ 15	400g	280	50	20	φ 16	φ 1.9	34	31	76	4	40°					
RM20DX	17~200	9~200		±0.08			430g	330														
RM30DX	17~300	9~300		±0.11			500g	410														
RM60DX	17~600	9~600		±0.11			1.16kg	780										85	25	69	116	6
RM100DX	21~1000	11~1000		±0.15			3.15kg	1200										90	32	φ 20	φ 4	67