


BCK **ADJUSTABLE, REPLACEABLE HEAD TORQUE WRENCHES WITH RUBBER GRIP**

Freely replace heads according to work applications. The combination of replaceable heads and torque adjustability make this series extremely versatile.

FEATURES

- Ring, ratchet, open end wrench and hex drive heads are available.
- The torque can be set to any value within the capacity range.
- Models are available ranging from 20 kgf·cm to 1,400 kgf·cm.
- Accuracy : $\pm 3\%$ of indicated value over the full range

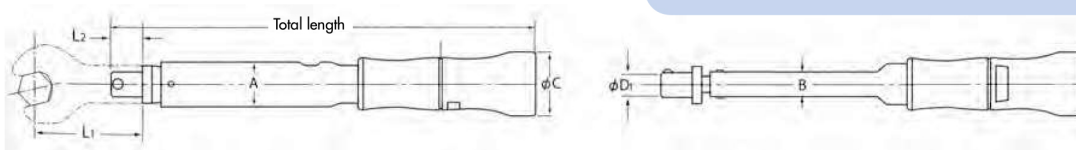

Model (kgf·cm)	Range kgf·cm	Increment kgf·cm	Model (N·m)	Range N·m	Increment N·m	Square drive mm	Total length mm	Dimensions (mm)						Weight kg
								Head			Body			
								phi D1	L1	L2	A	B	phi C	
250BCK	50~250	2	N25BCK	5~25	0.2	9.53(3/8")	205	10	45	13	18.2	9.6	29	0.2
500BCK	100~500	5	N50BCK	10~50	0.5		227	12	55	16	25	11.4	35	0.35
1000BCK	200~1000	10	N100BCK	20~100	1	12.7(1/2")	318	15	65	18	27.5	12.4	38	0.58
1400BCK	200~1400	10	N140BCK	20~100	1		356	15	65	18	27.5	12.4	38	0.66