BESTOOL - KANON

# QLK-LR LARGE HUB NUT TORQUE WRENCHES

Ideal for tightening hub nuts on large trucks and buses

## FEATURES

- Dual square drives for both clockwise and counterclockwise tightening.
- By replacing the sockets, various sizes of fasteners can be tightened within the tool's capacity range.
- By reversing the switch on the ratchet, the wrench can be used to loosen fasteners. Tightening to a torque setting, however, can only be done in the direction of the arrow.
- Accuracy : ±3% of indicated value over the full range

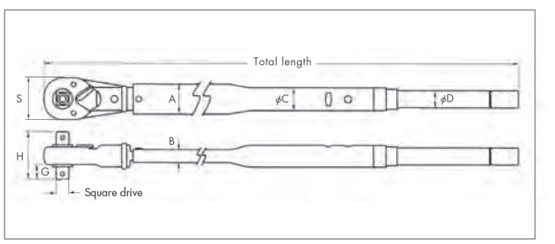

**N7000QLK-LR**

| Model (kgf·m) | Range | Increment | Old Model (N·m) | New Model (N·m) | Range | Increment | Square drive | Total length | Dimensions (mm) | | | | | | | Weight | Standard Accessory |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Head | | | Body | | | | | |
| | kgf·m | | | | N·m | | mm | mm | S | G | H | A | B | ϕC | ϕD | kg | |
| 7000QLK-LR | 10~70 | 0.5 | N7000QLK-LR | N700QLK-LR | 100~700 | 5 | 19.05 (3/4") | 1,314 | 68 | 20 | 70 | 49 | 20 | 35.4 | 27.2 | 7.0 | Torque adjusting box wrench |
| 8500QLK-LR | 10~85 | | N8500QLK-LR | N850QLK-LR | 100~850 | | 25.4 (1") | 1,388 | 76 | 27 | 85 | 54 | 23 | 42.7 | 31.8 | 8.5 | |
| 10000QLK-LR | 10~100 | | N10000QLK-LR | N1000QLK-LR | 100~1000 | | | 1,538 | | | | | | | | 8.8 | |