PZ-32 SCREW REMOVAL PLIERS JS

- Vertical serrations bite and grip a screw head without slippage.
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Serrated side teeth lined consecutively, inter-meshed with each other
- Black oxide finish to increase rust-resistance!
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off during heavy duty use.

PZM-30 PLIERS MASK FOR PZ-32

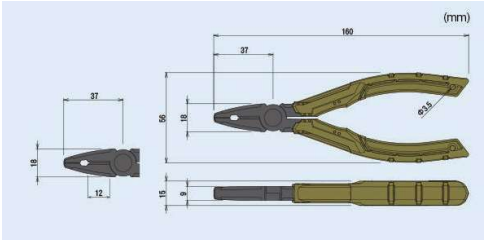

Inter-meshed, never let go.



Strap hole goes through the steel handle.

Item No.	Size	Material	Hardness	Cutting Capacity	Wgt.	Safety Hole
PZ-32	160㎜	Body:Carbon Steel Handles:TPR	HRC60±2	ϕ1.2㎜ (copper wire)	125g	ϕ3.5㎜

■ Screw head size

Top Jaws
ϕ3~ϕ9.5㎜

PZ-64・65 SCREW REMOVAL LOCKING PLIERS

- Vertically serrated jaws bite a screw head while locking it securely. It helps to optimize your hand strength for twisting off stubborn screws.
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Quick release mechanism, just open the handles to unlock the gripping jaws
- Rubber handles provide you with a comfortable grip.

PRODUCT VIDEO





PZ-65



PZ-64

Item No.	Max.Jaws	Cutting Capacity	O.A. Length	Hardness (Jaws)	Wgt.	Material
PZ-64	38㎜	Steel wire ϕ1.6㎜	150㎜	HRC57±3	205g	Body:Cr-Mo Handles:TPR
PZ-65	48㎜	Steel wire ϕ2.3㎜	190㎜		400g	

■ Screw head size

Item No.	Top Jaws
PZ-64	ϕ3~ϕ9.5㎜
PZ-65	ϕ7~ϕ12㎜